
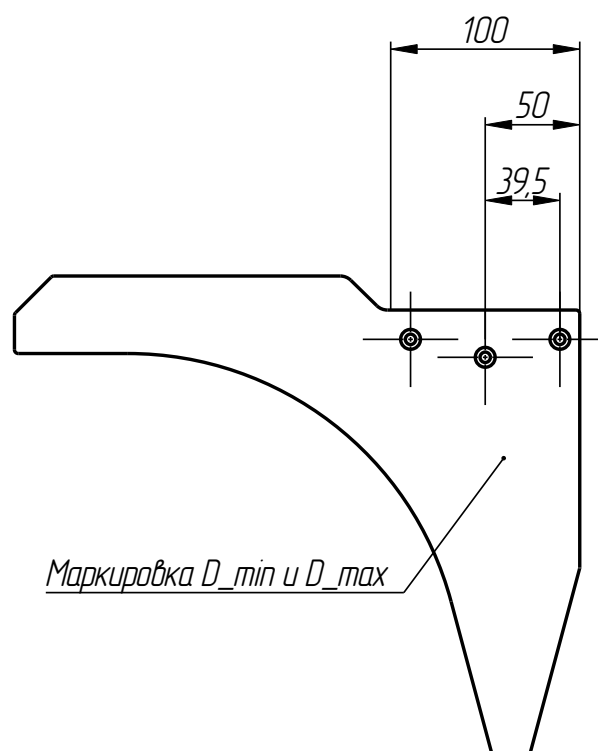


Верхняя модель: 10-401_V6_468-13		
	Параметр	
	D_MIN	D_MAX
Экземпляр		
10-401_V6_468-13_42-46	42	46
10-401_V6_468-13_46-50	46	50
10-401_V6_468-13_50-54	50	54
10-401_V6_468-13_54-56	54	56
10-401_V6_468-13_56-58	56	58
10-401_V6_468-13_58-60	58	60
10-401_V6_468-13_60-62	60	62,05
10-401_V6_468-13_62-64	62	64
10-401_V6_468-13_64-66	64	66
10-401_V6_468-13_66-68	66	68
10-401_V6_468-13_68-70	68	70
10-401_V6_468-13_70-72	70	72
10-401_V6_468-13_72-74	72	74
10-401_V6_468-13_74-76	74	76
10-401_V6_468-13_76-78	76	78
10-401_V6_468-13_78-80	78	80
10-401_V6_468-13_80-82	80	82
10-401_V6_468-13_82-84	82	84
10-401_V6_468-13_84-86	84	86
10-401_V6_468-13_86-88	86	88
10-401_V6_468-13_88-90	88	90
10-401_V6_468-13_90-92	90	92
10-401_V6_468-13_92-94	92	94
10-401_V6_468-13_94-96	94	96
10-401_V6_468-13_96-98	96	98
10-401_V6_468-13_98-100	98	100

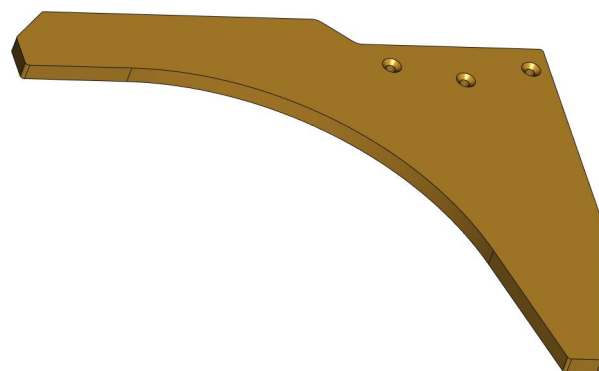

10-401_V6_468-13